


Updating (Repairing) an MXD to a Different Database

Updating or Repairing an mxd to use the current Enterprise Database:

A database connection must be created before repairing an mxd. Click [here](#) to learn how to create a database connection.

Open **ArcMap** and open an **mxd**. If the Database Connection window opens and the **Instance** does **not** contain a reference to **gisprep** or **gistrap**, **do not log in** and click **Cancel**. When the mxd opens, all the layers with a connection to the database will be broken as indicated by the red explanation mark in front of the layer name. (!)

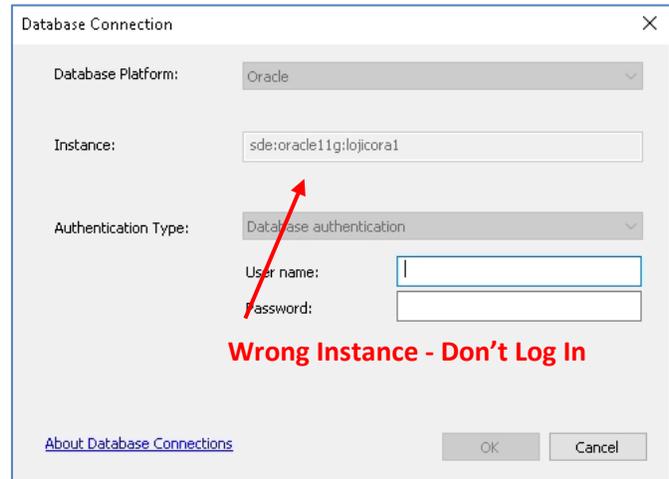

Right click on any broken layer and go to **Properties>Source** tab. Make note of the Feature Class name. Click **Cancel**.

Using the same layer, go to **Data> Repair Data Source**. Navigate to **Database Connections** and select **Connection to gisprep.sde**. Log in using your **current username and password**. Navigate to the layer feature class, select it and click **OK**. **All the layers in the mxd using a database connection will be updated**. Save the mxd.

